



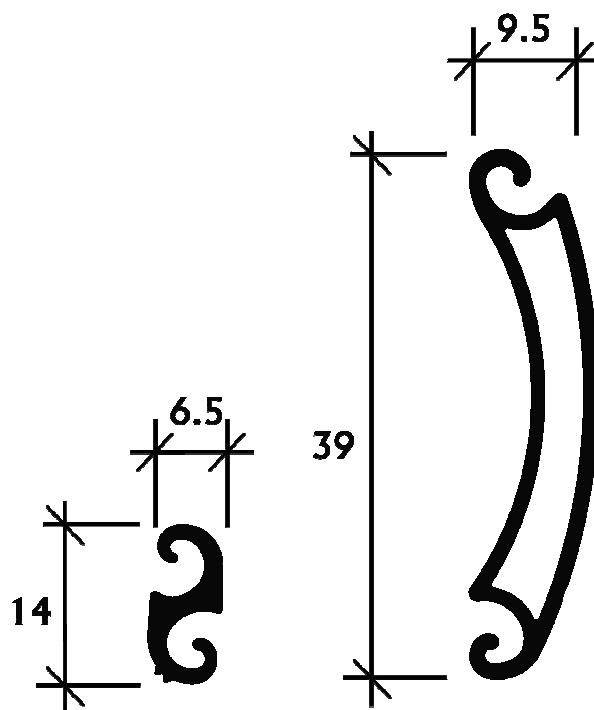

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-40A	
Peso / ml	Weight / m	Poids / ml	381	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	9525	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	2400	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	3000	mm
Superficie cobertura lama	Slat size	Pas de la lame	40	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	25	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.			
Ejes – Axis – Axes	40	60	ZF54
ALU. 137 45º - 90º	92	80	88
ALU. 150 45º - 90º	124	116	120
ALU. 165 45º - 90º	172	156	164
ALU. 180 45º - 90º	204	196	204
ALU. 205 45º - 90º	256	252	260
ALU. 250 45º - 90º		424	
ALU. ¼ REDONDO 137	92	80	88
ALU. ¼ REDONDO 150	124	116	120
ALU. ¼ REDONDO 165	172	156	164
ALU. ¼ REDONDO 180	204	196	204
ALU. ¼ REDONDO 205	256	252	260
AISLABOX ULTRA 155	92	80	88
AISLABOX ULTRA 185	172	156	164
AISLABOX ULTRA 200	204	196	204
AISLABOX ULTRA 223	256	252	260
PVC – EXTREBOX 155	92	80	88
PVC – EXTREBOX 185	172	156	164
PVC 200	204	196	204
PVC 223	256	252	260

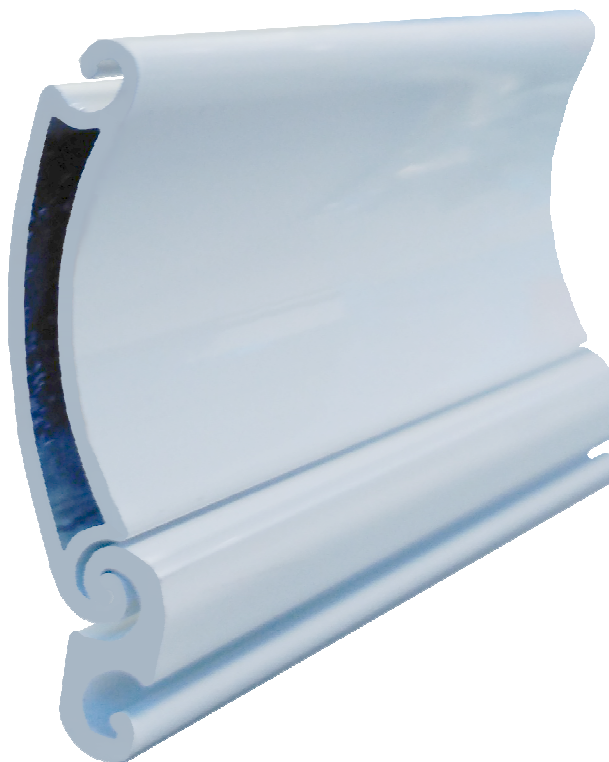


Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP40P

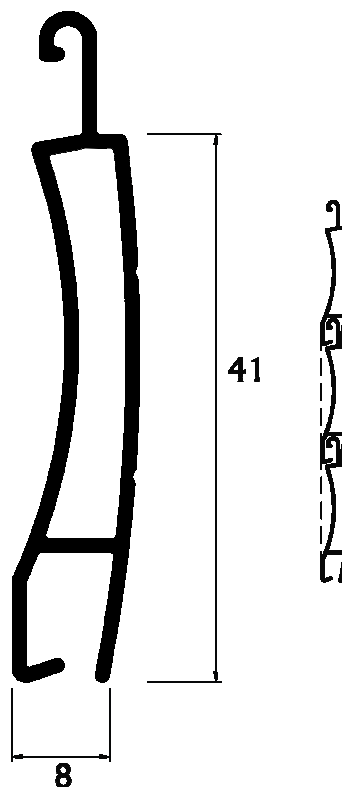**CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES EXP-40P**

Peso / ml	Weight / m	Poids / ml	259	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	6475	gr/m ²
Alto máximo aconsejado	Maximum high	Hauteur maximale	4.000	mm
Ancho máximo aconsejado	Maximum Width	Largeur maximale	3.700	mm
Superficie cobertura lama	Slat size	Pas de la lame	40	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	25	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

**Resistencia a las cargas de viento
Wind load Resistance
Résistance au vent**

Ancho x Alto Width x Height Largeur x Hauteur	UNE-EN 13659:2004
3800 x 2200	Class 3

Enrollamientos en cm.**Height of roller shutters in boxes****Enroulements en cm.**

Ejes – Axis – Axes	40	60	ZF54
ALU. 137 45º - 90º	100	80	84
ALU. 150 45º - 90º	140	120	120
ALU. 165 45º - 90º	180	160	140
ALU. 180 45º - 90º	220	208	172
ALU. 205 45º - 90º	272	260	268
ALU. 250 45º - 90º		436	
ALU. ¼ REDONDO 137	100	80	84
ALU. ¼ REDONDO 150	140	120	120
ALU. ¼ REDONDO 165	180	160	140
ALU. ¼ REDONDO 180	220	208	172
ALU. ¼ REDONDO 205	272	260	268
AISLABOX ULTRA 155	100	80	84
AISLABOX ULTRA 185	180	160	140
AISLABOX ULTRA 200	220	208	172
AISLABOX ULTRA 223	272	260	268
PVC – EXTREBOX 155	100	80	84
PVC – EXTREBOX 185	180	160	140
PVC 200	220	208	172
PVC 223	272	260	268




Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP44P

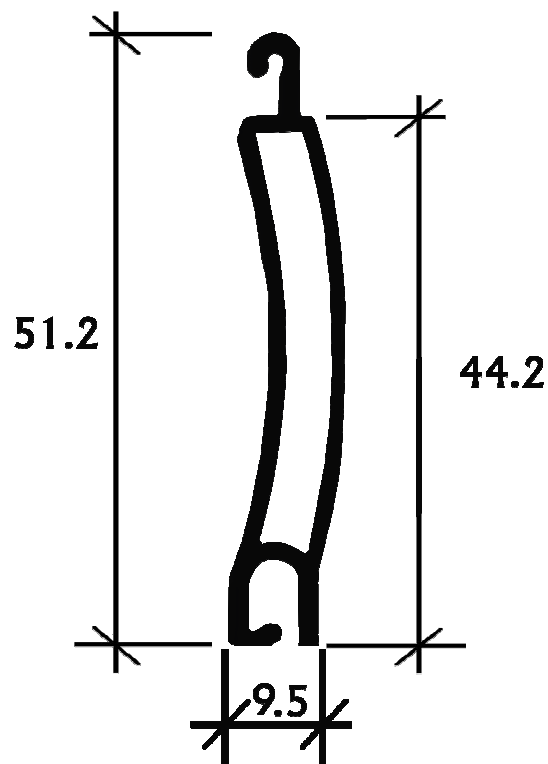

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES EXP-44P

Peso / ml	Weight / m	Poids / ml	292	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	6716	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	2800	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	2600	mm
Superficie cobertura lama	Slat size	Pas de la lame	44	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	23	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm.

Height of roller shutters in boxes

Enroulements en cm.

Ejes – Axis – Axes	40	60	ZF54
ALU. 137 45º - 90º	74	61	66
ALU. 150 45º - 90º	114	96	96
ALU. 165 45º - 90º	154	132	136
ALU. 180 45º - 90º	193	171	180
ALU. 205 45º - 90º	250	224	233
ALU. 250 45º - 90º		396	
ALU. ¼ REDONDO 137	74	61	66
ALU. ¼ REDONDO 150	114	96	96
ALU. ¼ REDONDO 165	154	132	136
ALU. ¼ REDONDO 180	193	171	180
ALU. ¼ REDONDO 205	250	224	233
AI SLABOX ULTRA 155	74	61	66
AI SLABOX ULTRA 185	154	132	136
AI SLABOX ULTRA 200	193	171	180
AI SLABOX ULTRA 223	250	224	233
PVC – EXTREBOX 155	74	61	66
PVC – EXTREBOX 185	154	132	136
PVC 200	193	171	180
PVC 223	250	224	233




Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP45A

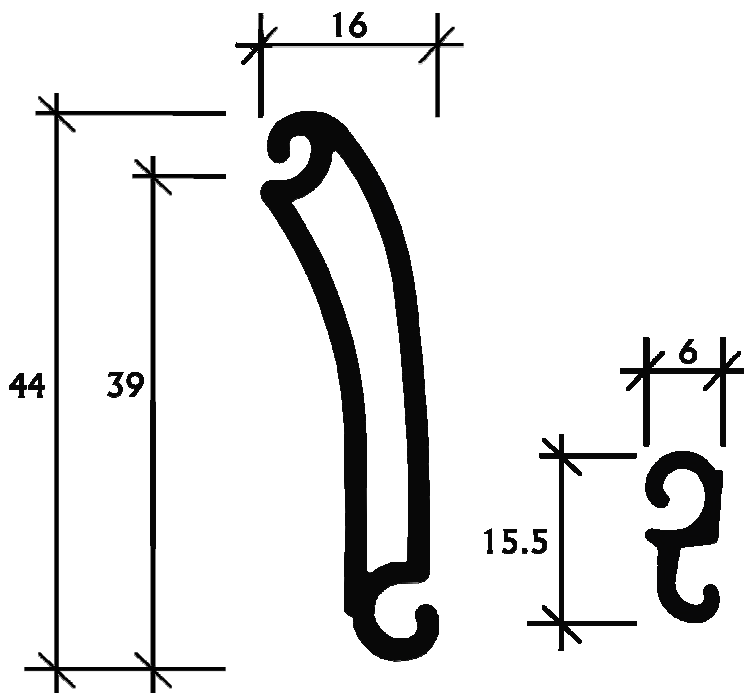

Enrollamientos en cm.

Height of roller shutters in boxes

Enroulements en cm.

Ejes – Axis – Axes	40	60	ZF54
ALU. 137 45° - 90°	72	81	76
ALU. 150 45° - 90°	103	117	112
ALU. 165 45° - 90°	144	157	153
ALU. 180 45° - 90°	184	198	193
ALU. 205 45° - 90°	243	256	238
ALU. 250 45° - 90°		378	
ALU. ¼ REDONDO 137	72	81	76
ALU. ¼ REDONDO 150	103	117	112
ALU. ¼ REDONDO 165	144	157	153
ALU. ¼ REDONDO 180	184	198	193
ALU. ¼ REDONDO 205	243	256	238
AISLABOX ULTRA 155	72	81	76
AISLABOX ULTRA 185	144	157	153
AISLABOX ULTRA 200	184	198	193
AISLABOX ULTRA 223	243	256	238
PVC – EXTREBOX 155	72	81	76
PVC – EXTREBOX 185	144	157	153
PVC 200	184	198	193
PVC 223	243	256	238

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES EXP-45A

Peso / ml	Weight / m	Poids / ml	440	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	10120	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4000	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	3900	mm
Superficie cobertura lama	Slat size	Pas de la lame	45	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	23	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m






Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP55

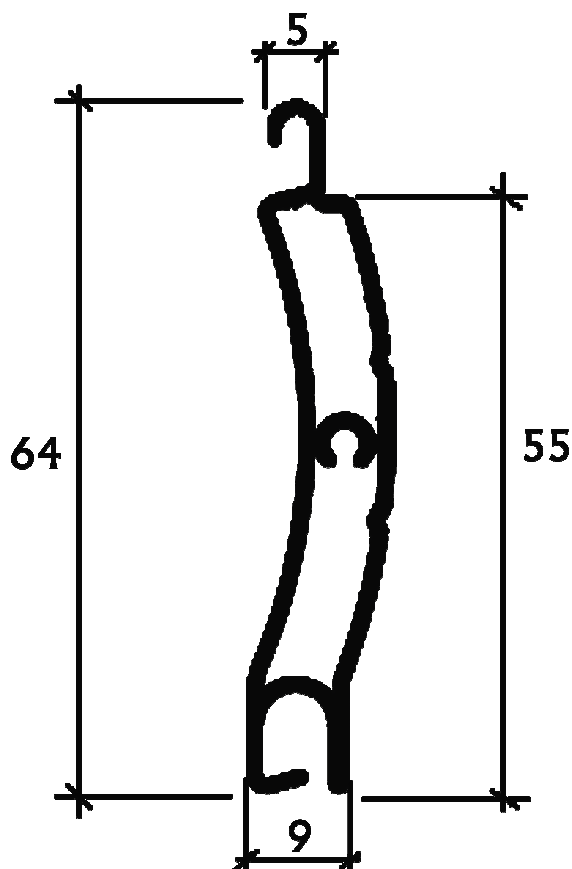

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-55	
Peso / ml	Weight / m	Poids / ml	447	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	8493	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4500	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	5100	mm
Superficie cobertura lama	Slat size	Pas de la lame	55	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	19	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.				
Ejes – Axis – Axes	60	70	100	120
ALU. 250 45° - 90°	302	280	264	220
ALU. 300 45°	456	473	434	412
ALU. 350 45°	627	699	605	577
ALU. 400 45°	907	852	814	781
ALU. ¼ REDONDO 250	302	280	264	220
ALU. ¼ REDONDO 300	456	473	434	412





Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP64

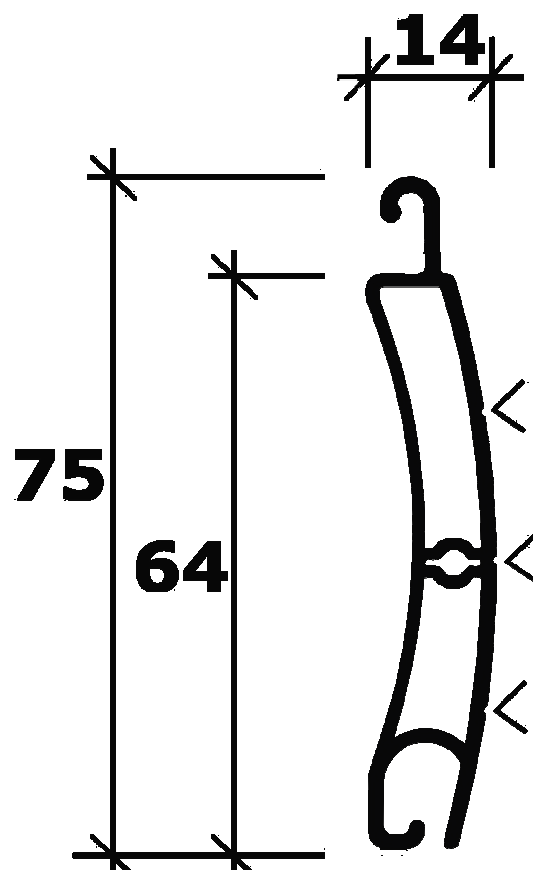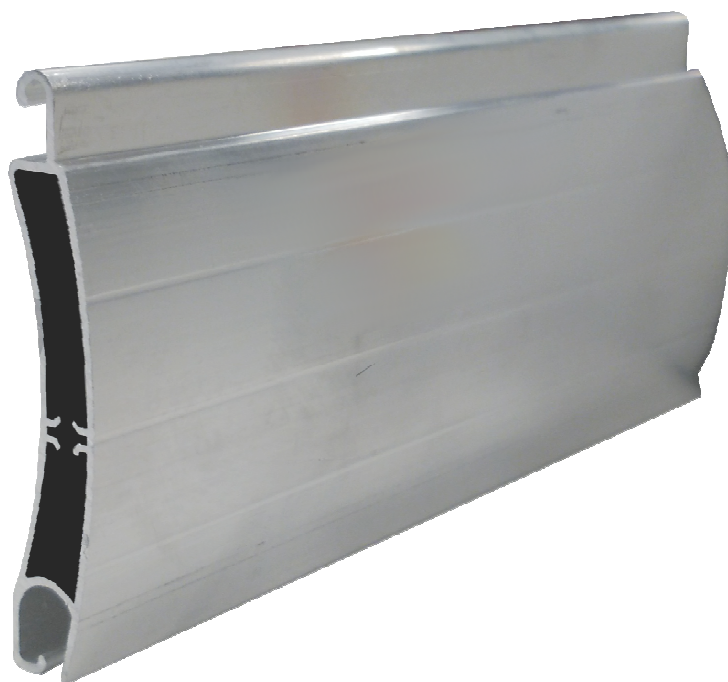

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-64	
Peso / ml	Weight / m	Poids / ml	515	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	8240	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4250	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	4800	mm
Superficie cobertura lama	Slat size	Pas de la lame	64	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	16	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.		
Ejes – Axis – Axes	70	100
ALU. 250 45º - 90º	275	237
ALU. 300 45º	428	384
ALU. 350 45º	614	550
ALU. 400 45º	806	748
ALU. ¼ REDONDO 250	275	237
ALU. ¼ REDONDO 300	428	384






Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP65A

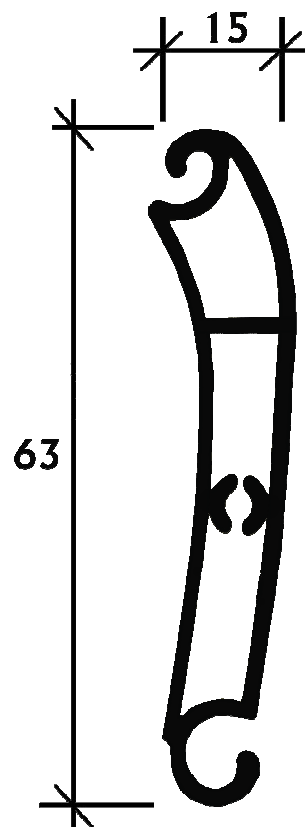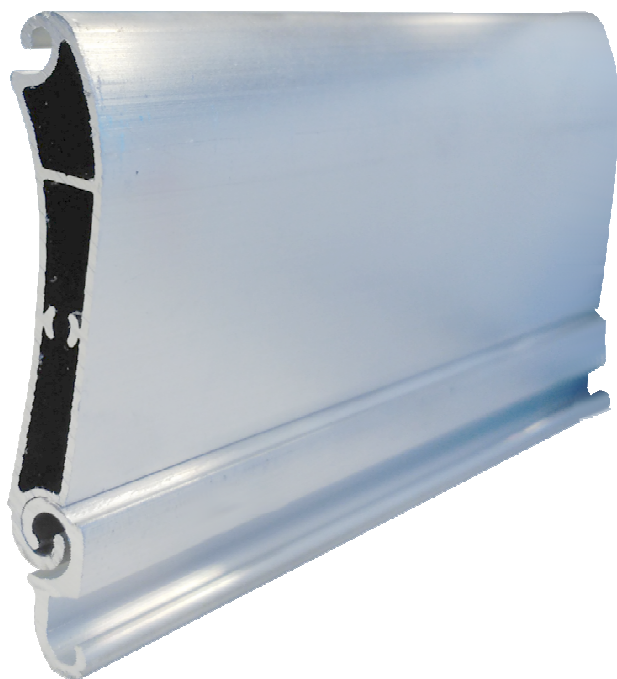

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-65A	
Peso / ml	Weight / m	Poids / ml	634	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	10144	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4500	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	4800	mm
Superficie cobertura lama	Slat size	Pas de la lame	65	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	16	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.		
Ejes – Axis – Axes	70	100
ALU. 250 45º - 90º	221	188
ALU. 300 45º	357	344
ALU. 350 45º	507	494
ALU. 400 45º	702	676
ALU. ¼ REDONDO 250	221	188
ALU. ¼ REDONDO 300	357	344



Lama de aluminio de extrusión.

Extruded aluminium slats.



Lames d'aluminium extrudées.

EXP79C/V



L EXP79

**L EXP79
VENTANA 88
PERFORADA**

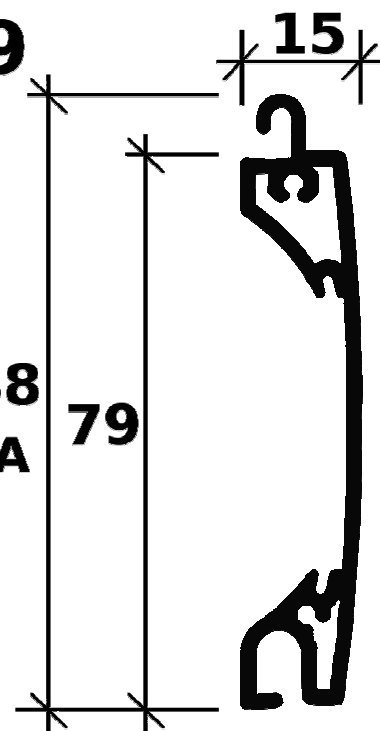

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-79C	
Peso / ml	Weight / m	Poids / ml	652	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	8476	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4250	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	5000	mm
Superficie cobertura lama	Slat size	Pas de la lame	79	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	13	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.		
Ejes – Axis – Axes	70	100
ALU. 250 45º - 90º	142	102
ALU. 300 45º	276	237
ALU. 350 45º	379	331
ALU. 400 45º	569	521
ALU. ¼ REDONDO 250	142	102
ALU. ¼ REDONDO 300	276	237







Lama de aluminio de extrusión.

Extruded aluminium slats.

Lames d'aluminium extrudées.

EXP100C

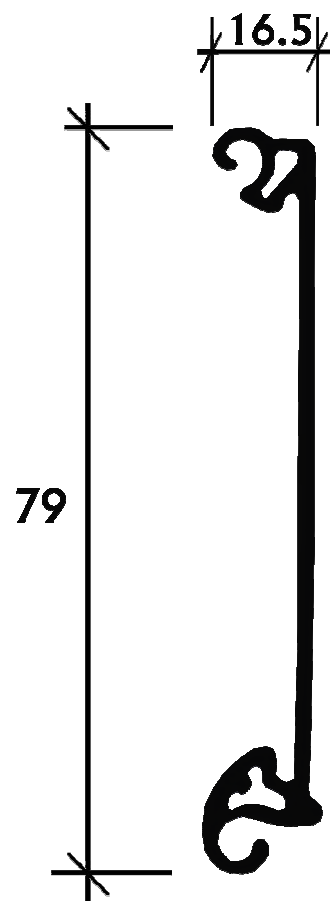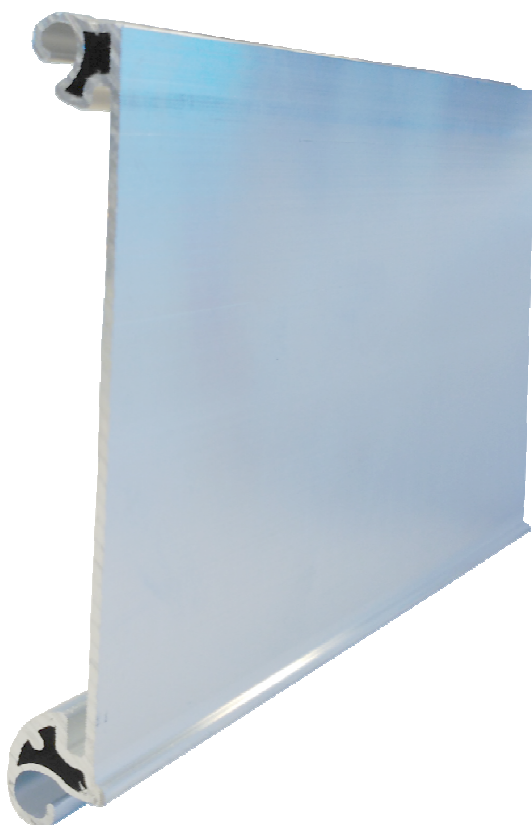

CARACTERÍSTICAS / FEATURES / CARACTÉRISTIQUES			EXP-100C	
Peso / ml	Weight / m	Poids / ml	685	gr/m
Peso / m ²	Weight / m ²	Poids / m ²	6850	gr/m ²
Alto máximo aconsejado	Maximun High	Hauteur maximale	4000	mm
Ancho máximo aconsejado	Maximun Width	Largeur Maximale	5000	mm
Superficie cobertura lama	Slat size	Pas de la lame	1000	mm
Nº de lamas por metro	Slats per meter	Nombre de lames au mètre	10	u.
Largo de fabricación	Lenght	Longueur de fabrication	5.8 / 6.0	m
Embalaje	Packing	Emballage	58 / 60	m

Enrollamientos en cm. Height of roller shutters in boxes Enroulements en cm.		
Ejes – Axis – Axes	100	120
ALU. 250 45º - 90º	100	80
ALU. 300 45º	230	190
ALU. 350 45º	330	280
ALU. 400 45º	480	470
ALU. ¼ REDONDO 250	100	80
ALU. ¼ REDONDO 300	230	190

